Drw rev: 1
File: MC001904A

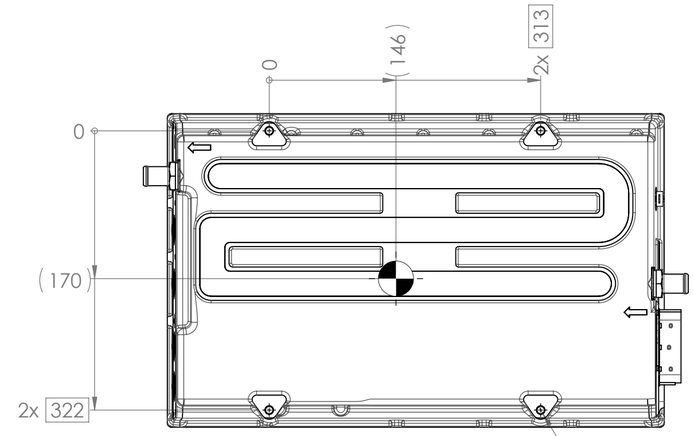

4x M10 internal thread
Screw engagement 16-25mm
Tightening torque 45 Nm ±20%
⊥ ∅ 0,6 A
4x B LD

M10 internal thread
Protective earth
Screw engagement 16-25mm
Tightening torque 45Nm ±20%
⌖ ∅ 1 A B-B

Hose nipple ∅22
Coolant in
⌖ ∅ 5 A B-B

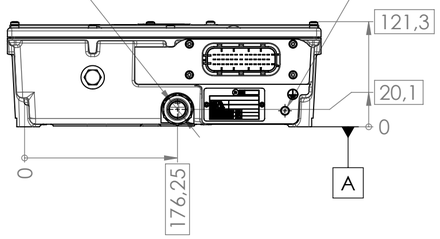

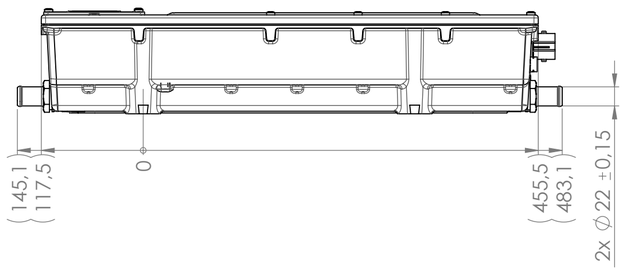

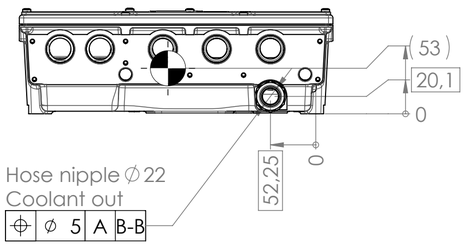

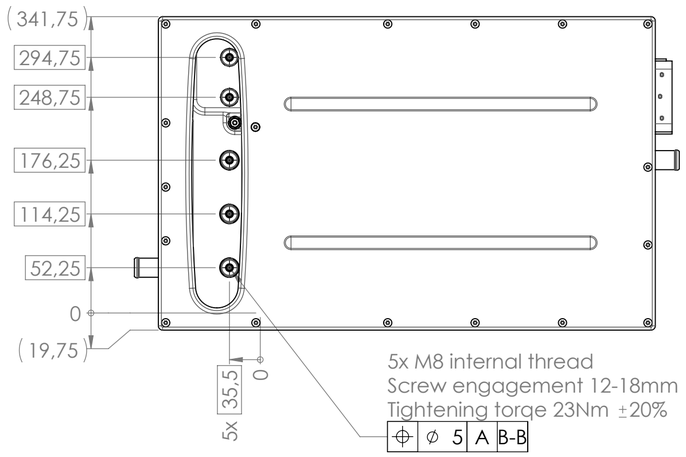

6x M5 screw
Tightening torque 5,5Nm ±20%

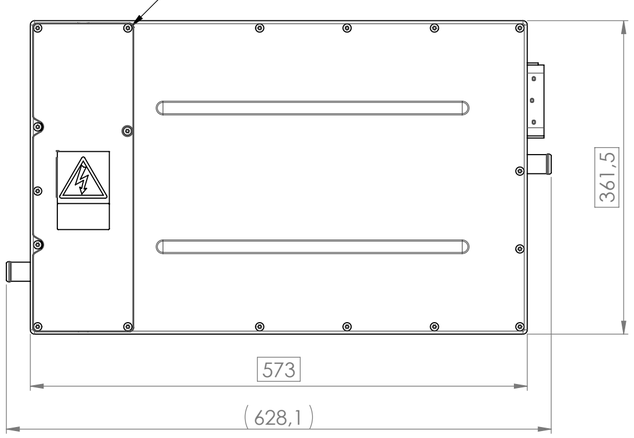

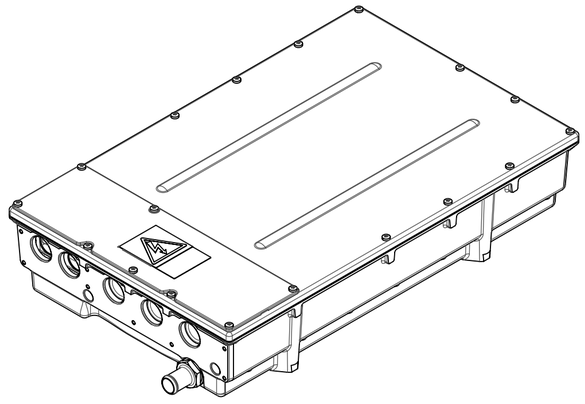

Drawing notes:
1. 3D-step or 2D-dxf are made nominal.
2. General for whole part ⌓ 10 A B-B.
3. -⊕- indicates center of mass.

Material:	
Surface Treatment:	
Description	Standard ACH L

Status	Initial Designer	Weight	General Tolerance	General Roughness	Units
released	CON	25 ± 1 kg	-	Ra:	mm

Document No.	Rev	Page No.	Projection View
MC002170A	01	1(1)	

Rev	Change note (from PDMW)	Changed	Date
01	First release.	CON	2019-01-25

This document must not be copied without our consent, nor must its contents be made known to others or otherwise unauthorizedly used. Inmotion

x A2